

Description

Absolute pleated cartridge in polypropylene or fiberglass with high retention capacity.

Construction

- Filtration from the inside to the outside.
- Large filtration area (up to 13.5 m² for a 60" module in Polypropylene).
- Absolute thresholds between 1 and 90 microns.
- Polypropylene cartridge core.
- Wide chemical compatibility.
- FDA compliant filter elements for polypropylene cartridges.
- Traceability by lot identification number.

Terms of service

Pressure

ΔP Recommended :

Polypropylene : 1,5 bar at 20°C

Fiberglass : 1,5 bar at 20°C

ΔP Max :

Polypropylene : 4,0 bar at 20°C

Fiberglass : 4,0 bar at 20°C

Temperature

T° Max : 60°C



Standard dimensions

Length : see tables at the back

External diameter : 152 mm


Internal diameter : 70 mm

Typical flow rates

for a 40" cartridge

— Polypropylene

- - - Fiberglass

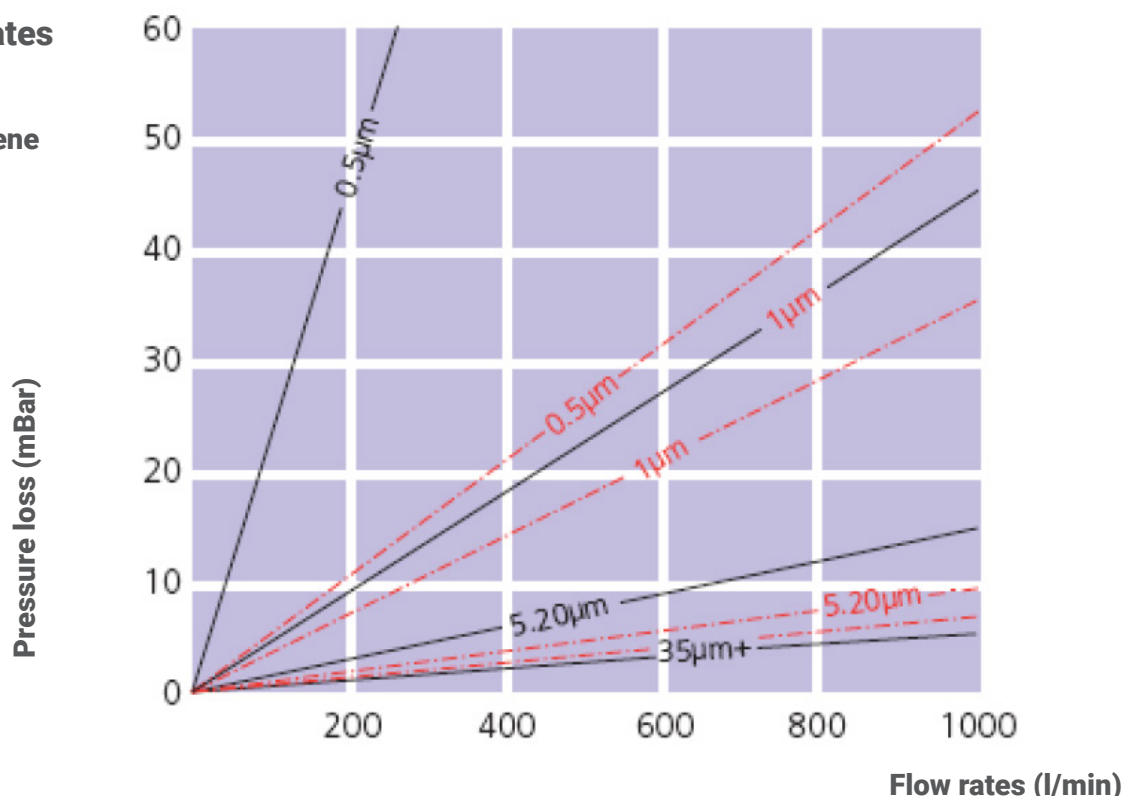

Order reference

REFERENCE QTP - **L** - **PP** - **01** - **20** - **0** - **N**
Tab 1 Tab 2 Tab 3 Tab 4 Tab 5 Tab 6

Table 1 : External diameter

Code	Description
L	152 mm

Table 2 : Media

Code	Description
PP	Polypropylene
GF	Fiberglass

Table 3 : Filtration threshold

Code	Description
01	1 µm
02	2,6 µm
03	3 µm
04	4,5 µm
05	5 µm
06	6 µm
10	10 µm
20	20 µm
50	50 µm
90	90 µm

Table 4 : Length

Code	Description
20	527 mm
40	1 038 mm
60	1 538 mm

Table 5 : Tip

Code	Description
0	Without
1	With

Table 6 : Seal material

Code	Description
N	NBR
E	EPDM
S	Silicone
F	FPM
P	FEP / Silicone
0	Without