

DESCRIPTION

100% Polyester synthetic fibers. Thermal binder

Chemically completely inert

High mechanical, chemical, and thermal resistance.

Excellent permeability, especially to high-viscosity whole oil.

ORDER REFERENCE

Example :

QBAND -PETF - A
50 - B
500 - C
100

A / Grammage

Code	Grammage	Thickness	Air permeability	Nominal rating
25	25 gm/m ²	0,14 mm	2100 l/(m ² -s) @ 50 Pa	50 µm
32	32 gm/m ²	0,2 mm	1750 l/(m ² -s) @ 50 Pa	40 µm
50	50 gm/m ²	0,2 mm	2200 l/(m ² -s) @ 50 Pa	30 µm
70	70 gm/m ²	0,28 mm	2600 l/(m ² -s) @ 100 Pa	20 µm
100	100 gm/m ²	0,40 mm	1400 l/(m ² -s) @ 100 Pa	10 µm

B / Width of roll



Code	Width
500	500 mm
700	700 mm
1000	1000 mm

Other widths upon request

Material

Thermally Bonded Polyester

BELT FILTER COMPATIBILITY



C / Length



Code	Length
100	100 m

Other lengths upon request

How to choose the right filter paper for your industrial process?



Nominal rating (µm) 70 65 60 55 50 45 40 35 30 25 20 15 10 5

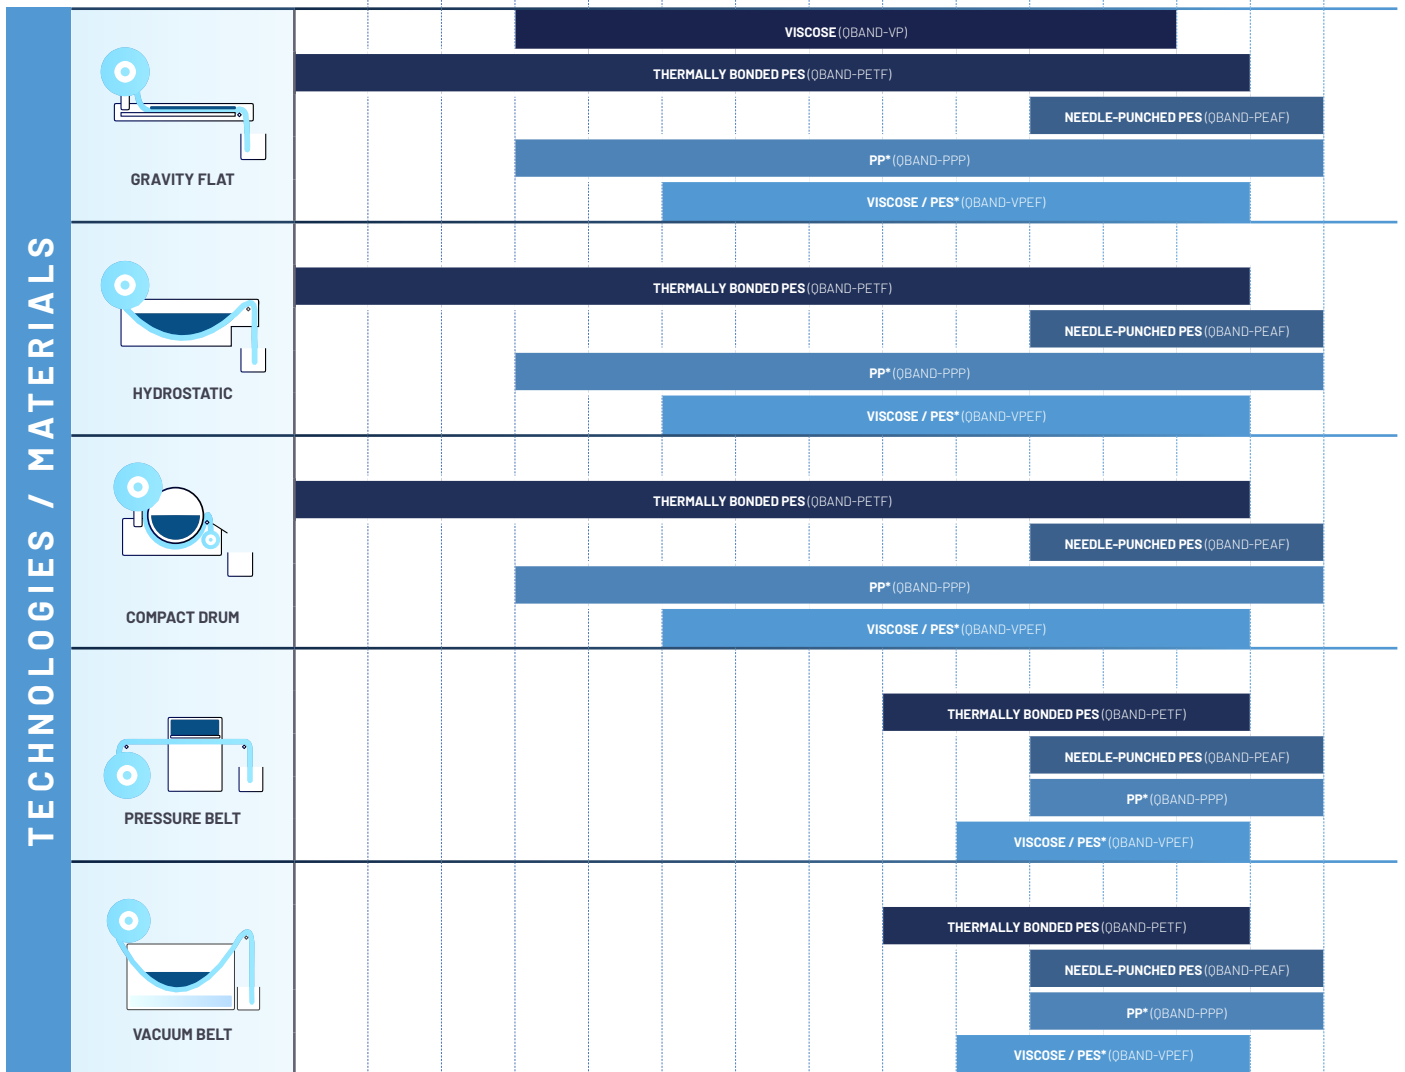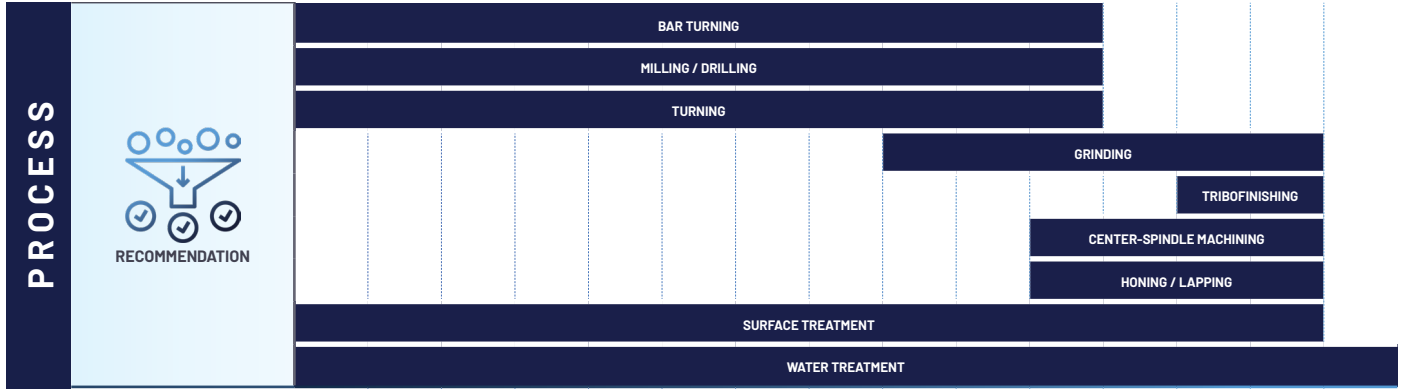

* PES = Polyester / PP = Polypropylene

70 65 60 55 50 45 40 35 30 25 20 15 10 5